

MARCH PUMPS

DC Brushless BC-2CP-MD
DC Brush BC-2CP-MD

1819 PICKWICK AVE., GLENVIEW, IL 60026-1306, U.S.A PHONE: (847) 729-5300 - FAX: (847) 729-7062 WWW.MARCHPUMP.COM


DESCRIPTION & OPERATION:

Series 2 are centrifugal magnetic drive pumps, eliminating the need for a shaft seal. Pumps can be serviced with a screwdriver. See the parts list for a breakdown of parts. Pumps are not self-priming, lack a suction lift, and thus require a **flooded suction**. Pumps **cannot be run dry** because the impeller requires the liquid being pumped for lubrication. For liquids with a specific gravity greater than water, have a higher viscosity, or for elevated temperatures, a trimmed impeller may be necessary. Brushless motors must be operated within a restricted voltage range due to the electronics. For application assistance, contact March Pump.


Materials in Contact with Solution: Polypropylene, Ceramic & Viton

LIMITED WARRANTY:

March pumps are guaranteed only against defects in workmanship or materials for a period of one year from date of manufacture pumping water. For the complete warranty and to register online go to www.marchpump.com/warranty-registration

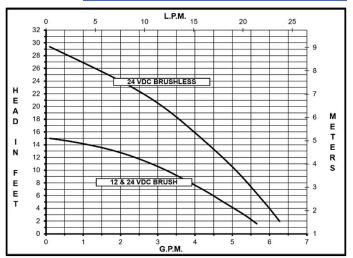

BC-2CP-MD (12V & 24V DC) BC-2CP-MD (24V DC) **BRUSHLESS MOTOR BRUSH MOTOR** With 11-1/2" Leads **SPECIFICATIONS** With 9" Leads Red is Positive Red is Positive Black is Negative Black is Negative Restrictive Voltage Range: 14V to 30V 24VDC: 0125-0123-0200 0125-0123-0400 Product # 12VDC: 0125-0123-0100 Inlet - Outlet 3/8" FPT & 3/4" MPT - 1/4" MPT 3/8" FPT & 3/4" MPT - 1/4" MPT 50 psi - 344 kPa Max Internal Pressure 50 psi - 344 kPa 190 °F / 87 °C °F / 87 °C Max Liquid Temperature Max Flow Max Head **ELECTRICAL** Width Height Length **Packed Weight** MODEL gpm lpm ft psi Hp kW Rpm Inches cm Inches cm Inches lbs kg m 3.5 1/25 0.029 12 42 3650 **BC-2CP-MD Brush** 22.7 15 6.5 4.44 11.2 4.50 11.4 7.61 19.3 46 18 1.8 1/25 0.029 24 43 3650 **BC-2CP-MD Brushless** 12.5 8.8 11 4 23.4 29 4 44 112 4 50 5 84 14 8 1.8 24 50 2.1 | 1/25 | 0.029 | 3800

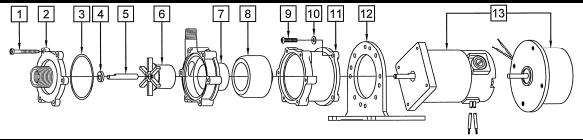

All specifications & data are based on pumping water & are intended as a guideline only. Specifications may vary with different motors.

NOTE: When attaching the Drive Magnet to the motor shaft, position the face of the Drive Magnet 1/16 inch below the face of the Motor Bracket. SIZE (Inches) **Brush Brushless DESCRIPTION MATERIAL** QTY. **BC-2CP-MD BC-2CP-MD** Brush **Brushless** 1 Self-Tapping Screw #7-19 x 1-7/16 Lg. 0115-0062-1000 Stainless 6 2 Cover Polypropylene 3/8 FPT x 3/4 MPT 0125-0056-1000 1 Viton 3/32 CS x 2-3/16 OD 1 0125-0065-1000 3 "O" Ring Buna N (Option) 3/32 CS x 2-3/16 OD 1 0125-0066-1000 4 Thrust Washer 0130-0028-1000 Ceramic 1 0125-0061-1000 Ceramic 1 5 Shaft Stainless (Option) 1 0125-0125-1000 0125-0087-0200 6 Impeller Encapsulated Polypropylene 1 7 Rear Housing 1/4 MPT 0125-0058-1000 Polypropylene 0125-0083-0200 0.250 Bore 0125-0083-0100 8 Drive Magnet 9 Screw Stainless #8-32 x 3/4 Lg. 4 0210-0036-1000 10 Washer **Stainless** #8 4 0858-0004-1000 11 Motor Bracket 0125-0069-1000 Plastic 1 12 Base 1 0125-0106-1000 Plastic Motor, 12 Volts DC 1 0809-0101-1000 Motor, 24 Volts DC 0809-0103-1000 0125-0128-1000 NOTE: Contact Factory for other materials and/or parts not listed. 0125-0076-1100 R4